

Simple 3D Surface Reconstruction Using Flatbed Scanner and 3D Print

Vaclav Skala
University of West Bohemia
Plzen, Czech Republic
skala@kiv.zcu.cz

Rong Jiang Pan
Shandong University
Jinan, China
panrj@sdu.edu.cn

Ondrej Nedved
University of West Bohemia
Plzen, Czech Republic
sahib@students.zcu.cz

1. Introduction

Reconstruction of nearly flat 3D objects can be used in many applications, e.g. getting 3D surface for games, reconstruction of historical fragments etc. The presented approach uses a flatbed scanner to reconstruct a surface of nearly flat objects without calibration and produce a 3D copy of the scanned object using a 3D printer.

Position of the light source and CCD sensor in 2D flatbed scanners is not the same, i.e. light is coming under some angle α , which causes small “shadowed” contours in scanned images. The given object is scanned in four orthogonal positions ideally and if not images have to be transformed appropriately.

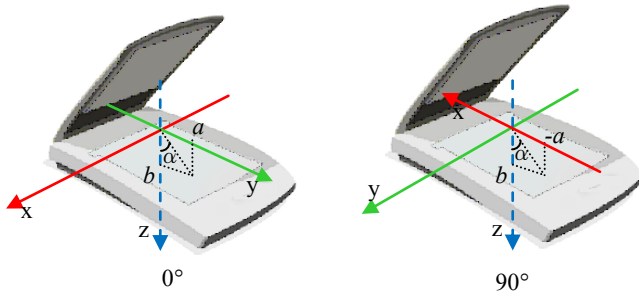


Figure 1: Two of four fundamental orientations in scanning

2. Normal Vector Reconstruction

The CCD sensor of the flatbed scanner is linear and the light source is fixed under α angle. Therefore it is possible to reconstruct normal vector \mathbf{n} for each scanned pixel as the scanned pixel's intensity I_0 is given as:

$$I_0 = \rho \int_{-l}^l \langle \mathbf{n}, \mathbf{l} \rangle dx = \rho(n_y a + n_z b) \int_{-l}^l \frac{1}{\sqrt{x^2 + a^2 + b^2}} dx$$

$$= \rho s(n_y a + n_z b)$$

where $\mathbf{l} = [x, a, b]^T / \sqrt{x^2 + a^2 + b^2}$ is the normalized lighting vector and

$$s = \int_{-l}^l \frac{1}{\sqrt{x^2 + a^2 + b^2}} dx = 2 \ln \frac{l + \sqrt{l^2 + a^2 + b^2}}{\sqrt{a^2 + b^2}}$$

Similarly it can be computed for other positions. This leads to equations

$$\begin{bmatrix} 0 & \tan \alpha & 1 \\ 0 & -\tan \alpha & 1 \\ -\tan \alpha & 0 & 1 \\ \tan \alpha & 0 & 1 \end{bmatrix} \begin{bmatrix} \rho s b n_x \\ \rho s b n_y \\ \rho s b n_z \end{bmatrix} = \begin{bmatrix} I_0 \\ I_{180} \\ I_{90} \\ I_{270} \end{bmatrix}$$

where:

$$\rho s b n_x = \frac{I_{270} - I_{90}}{2 \tan \alpha} \quad \rho s b n_y = \frac{I_0 - I_{180}}{2 \tan \alpha}$$

$$\rho s b n_x = \frac{I_0 + I_{180} + I_{90} + I_{270}}{4} \quad \tan \alpha = \frac{a}{b}$$

Also a curvature optimization can be made to obtain better results. However the crucial step is the surface reconstruction from the obtained map of normal's and boundary conditions, actually height on the object boundary.

2. Surface Reconstruction

As we expect nearly flat 3D objects, known height on a boundary is assumed. The inner part, i.e. 3D profile, is given by the normal vector reconstruction part. It means that it is a “classical” 2D boundary problem known from Finite Elements Methods, which leads to solution of a sparse linear system of equations $\mathbf{Ax} = \mathbf{b}$ in general. However, the normal reconstruction process is still very noisy. Therefore for the reconstruction two orthogonal 1D reconstructions were used, i.e. for x and y axes. This leads to over-determined linear system of equations and least square error was used for solution. When a surface is reconstructed, a triangular mesh is generated so that the volume was closed. The scanned coin was of a diameter of 25 mm. The reconstructed object was scaled to a diameter of 55mm and 3D printer's grain had 0.2 mm, see Fig.2. However it should be noted that due to “noisy” normal vectors, the height as to be adjusted accordingly.



Figure 2: Original object and reconstructed surface

3. Conclusion and Acknowledgment

The presented concept was experimentally verified and 3D reconstructed object was printed on a 3D printer. It should be noted that some 2D scanners produce images with small non-linearity which should be corrected to get better results.

This research was supported by MSMT CR projects LG13047, LH12181 and China-Czech Scientific and Technological Collaboration Project 40-8 and Shandong Natural Science Foundation of China, Grant No. ZR2010FM046.

References

- [1] Brown,B., Toler-Franklin,C., Nehab, D, Burns,M., Dobkin,D., Vlachopoulos,A., Doumas,C., Rusinkiewicz,S., Weyric,T. 2008. A system for high-volume acquisition and matching of fresco fragments: Reassembling Thera wallpaintings. ACM Trans.Graph.,pp.1-9.
- [2] Clarkson,W., Weyrich,T., Finkelstein,A., Heninger,N., Halderman,J.A., Felten,E.W. 2009. Finger printing Blank Paper Using Commodity Scanners. In IEEE Symp. on Security and Privacy (SP '09). IEEE Comp. So., Washington, USA, 301-314.
- [3] Johnson,M.K., Cole,F., Raj,A., Adelson,E.H. 2011. Microgeometry capture using an elastomeric sensor. ACM TOG 30, No.4, Article 46.
- [4] Martedi,S., Saito,H., Sevieres,M.2009. 3D Shape Reconstruction of Sole Surface of Human Foot using Flatbed Scanner, FCV 2009.
- [5] Pintus,R., Malzbender,T., Wang,O., Bergman,R., Nachlieli,H., Ruckenstein,G. 2010. Photo Repair and 3D Structure from Flatbed Scanners Using 4- and 2-Source Photometric Stereo. Computer Vision, Imaging and Computer Graphics. Theory and Applications, Springer Berlin Heidelberg, Vol.68, pp.326-342.
- [6] Woodham,R.J. 1980. Photometric Method for Determining Surface Orientation from Multiple Images. Optical Eng., 19(1):139-144.